
tam p-Tech™ Series Paver



Stamp-Tech™ Slate pavers have been designed to reproduce the texture, color and appearance of natural slate. Its irregular top surface was developed from actual sections of stone. By rotating the direction of the pavers during installation the natural effect is complete. Slate Face pavers are available in several size from a nominal 12" x12" to a nominal 20" x 20" in addition to various colors.

Stamp-Tech™ pavers can be manufactured in wide range of designs and sizes in addition to endless colors & aggregate mixes. Any of our standard sizes or custom sizes (order size permitting) can be manufactured in various surface designs. Our wide design options range from a simple Flat monochromatic finish, Slate-Face™ finish to a more distinct look such as the Coral-Face™ or Wave-Face™ designs.

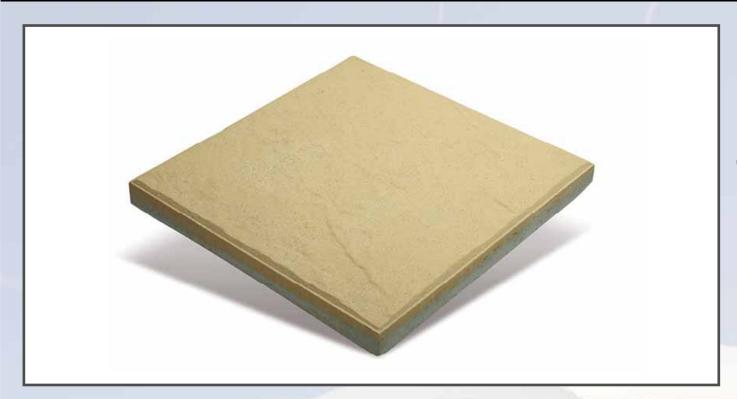

Saltwater Resistant All Tile Tech Pavers products are highly compressed during production making the product stronger and more resilient to salt attack, water absorption and surface damage such as chipping and cracking.



Slate Face Pavers provide the look and feel of natural slate at a fraction of the cost. The distinctive rippled finish adds an extra element of texture to any courtyard, pool or patio project.




Custom Colors & Designs
Stamp-Tech™ Pavers are
available in an unlimited choice
of colors and surface finishes to
meet any design requirements.





Slip Resistant All Tile Tech Pavers products are designed to meet slip resistance criteria making them ideal for use in all wet or dry outdoor areas, stylish courtyards and pool surrounds.


Standard Sizes










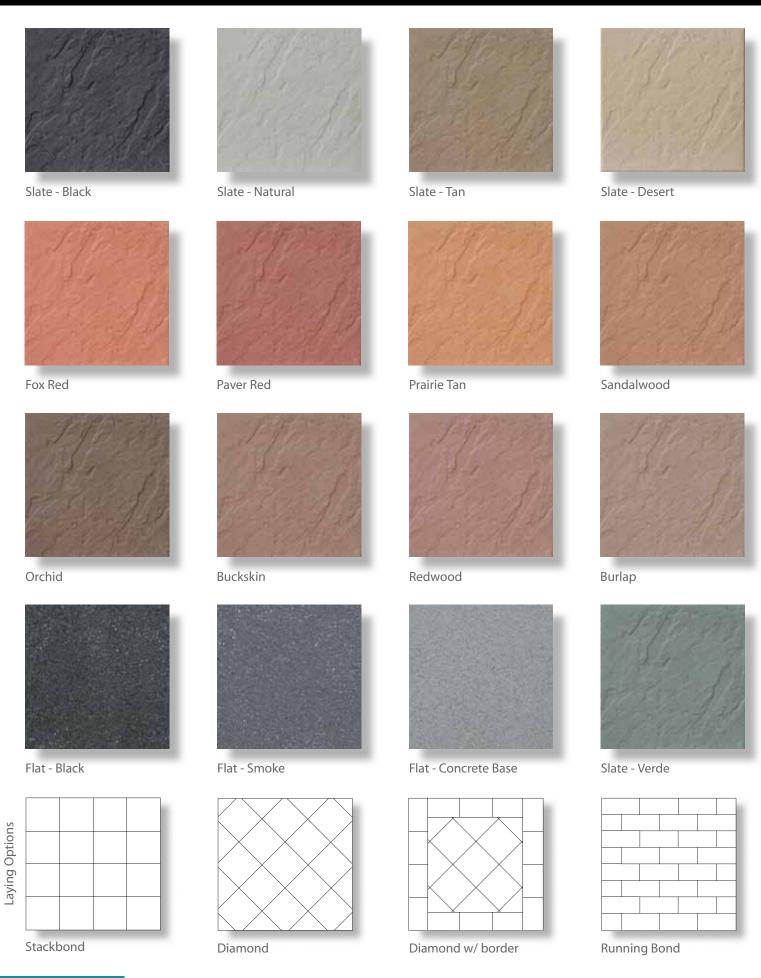

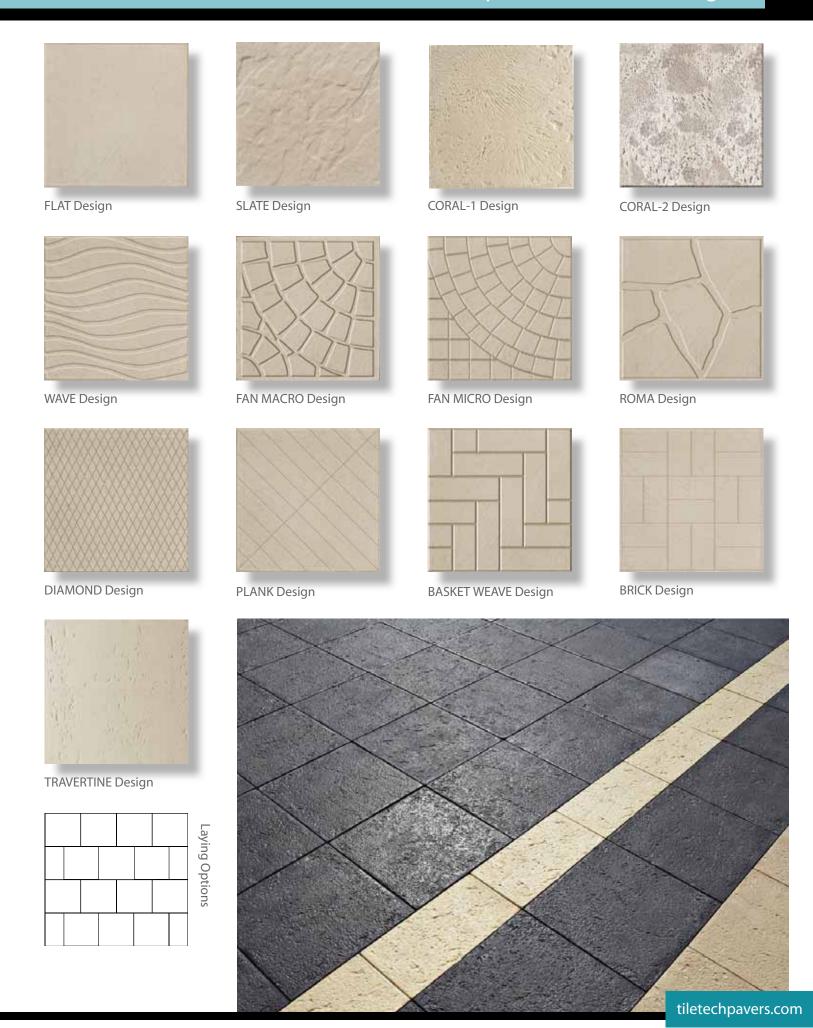

PAVER SPECS	Size L x W (inch)	Thickness (inch)	Weight per SqFt (Lb)	Weight per Unit (Lb)	Unit per Pallet (pcs)	Colors			
						Granite-Tech	Stamp-Tech	Oceanic Ser.	Cool-Roof
12 x 12	11.875" x 11.875" 300mm x 300mm	1" • 1-1/2" 2" •	11lb 21lb	11lb 21lb	250 126	•	•	•	
12 x 24	11.875" x 23.622" 300mm x 600mm	1" 1-1/2" • 2" •	16lb 20lb	32lb 40lb	95	•	•	•	٠
16 x 16	15.75" x 15.75" 400mm x 400mm	1" 1-1/4" • 1-1/2" •	15lb	30lb	108	•	•	•	٠
16 x 24	15.75" x 23.622" 400mm x 600mm	1" 1-1/4" 1-1/2" • 2" •	16lb 21lb	42lb 55lb		•	•	•	
20 x 20	19.68" x 19.68" 500mm x 500mm	1" 1-1/2" 2" •	21lb	58lb	48	•	•	•	
Coping	48"x 14" 1200mm x 400mm *Full Rounded Bullnose	1" 1-1/2" 2"	18lb	70lb	12	•	•	•	J

PAVER PROPERTIES	TEST METHOD	RESULTS		
Compressive Strength	ASTM C-140	8,000psi Min		
Flexural Strength	ASTM C-293	700psi Min		
Water Absorption	ASTM C-936	5% Max		
Coefficient of Friction	ASTM C-1028	0.6% Min		
Freeze Thaw	ASTM C-67	1% Max		
Dimensional Tolerance	+/- 1/16" Length, width, height, convex, concave.			

For complete material & installation specifications, please visit our website or contact us.

MAINTENANCE

Pavers will require some periodic maintenance to keep them in a reasonable condition. Dirt, dust and leaves should be regularly removed and any weed growth should be sprayed and controlled.

CLEANING

All pavers will require cleaning from time to time. Oil, rust, efflorescence and other stains can detract from the appearance of the paver. Specialized cleaning products for concrete pavers are readily available.

SEALING

If a more protective surface is required or the pavers will knowingly be subject to salt attack then we suggest sealing your paving. Tile Tech recommends sealing pavers not for structural reasons but for aesthetic and maintenance purposes.