

# SAND - STONE

## PORCELAIN PAVERS

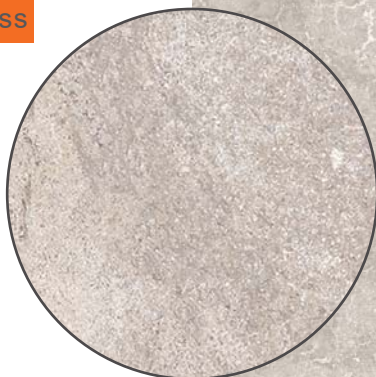
## SIZES

 3/4" thickness



23<sup>1</sup>/<sub>2</sub>" x 23<sup>1</sup>/<sub>2</sub>"  
598 x 598 mm



11<sup>3</sup>/<sub>4</sub>" x 23<sup>1</sup>/<sub>2</sub>"  
298 x 598 mm



## Color &amp; Shade Variation



V3  
High shade  
& texture variation

## Installation Methods



THIN-SET  
INSTALLATION



SAND & GRAVEL BASE  
INSTALLATION



RAISED PEDESTAL  
INSTALLATION



LOW PEDESTAL  
INSTALLATION

Our Stone Series™ porcelain pavers offers the beauty and aesthetics of stone, without the maintenance and upkeep required for natural stone materials. Completely nonporous, they will not stain and require no sealing. Extremely high slip resistance for all finishes, ensures a safe floor area wet or dry.

| Technical Details       |                |
|-------------------------|----------------|
| Weight                  | 9.3 lb/sq.ft.  |
| Water Absorption        | 0.05%          |
| Static Load (Center)    | 1,800 lbf      |
| Slip Resistance         | R11 (DIN51130) |
| Frost Reistant          | Yes            |
| Solar Reflectance (SRI) | 61             |
| Rectified               | Yes            |

| Packaging Details   |  |
|---------------------|--|
| Packaging (24 x 24) | 72 pcs   279 sq.ft.   2,700 lb / Pallet  |
| Packaging (12 x 24) | 160 pcs   310 sq.ft.   2,950 lb / Pallet |

Full test reports and specification details available on our site.

